

**ECP - PAD**

Is useful under equipment of all speeds.  
To minimize transmission of disturbances to the floor and disturbances from the floor.

**HIGH SPEED 1500 CPM AND UP**

ECP - Pad eliminates noise and reduces vibrations transmitted from:

- AIR CONDITIONING EQUIPMENT
- TRANSFORMERS
- ENGINES
- PUMPS AND PIPING
- STEAM GENERATORS

**MEDIUM SPEED 250 to 1500 CPM**

ECP - Pad simplifies mounting and limits noise transmission from:

- COMPRESSORS (TANK MOUNTED)
- AIR CONDITIONERS
- FANS

**LOW SPEED 0 to 250 CPM**


ECP - Pad limits impact shock and noise from:

- PUNCH PRESSES
- SHEARS

**LOW & HIGH SPEED 0 to 250 CPM AND 1500 CPM AND UP**

ECP - Pad protects these sensitive instruments, machines and devices from low frequency shocks and high frequency vibrations present in the floor from:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

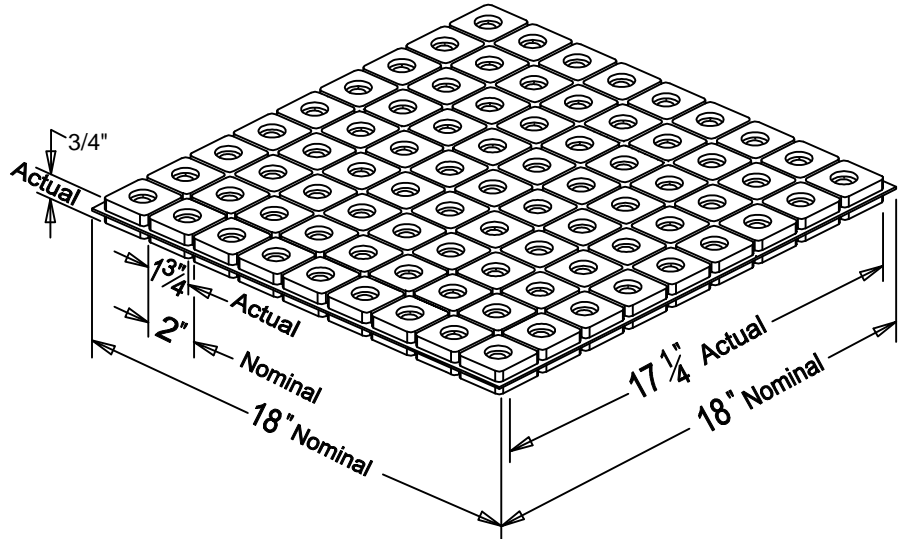

**MATERIAL**

18" x 18" x 3/4" Thick Rubber. Easily knife cut on site.

**LOAD CAPACITY**

Load capacity to 60 Pounds/Square Inch = 60 PSI

**NON - SKID**

Tread surfaces resist "Walking"

Conservative 40 P.S.I or less Selection Guides assume equal weight distribution of 4 points or 6 points, or 8 points or 12 points of support.

**EXAMPLE**

5000 pound weight centered equipment can be supported at 4 corners by 6x6 or 6 points by 4x6 or 8 points by 4x4 or 12 points by 4x4.

4 Point Selection Guide		6 Point Selection Guide		8 Point Selection Guide		12 Point Selection Guide	
Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)	Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)	Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)	Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)
640	2 x 2	960	2 x 2	1280	2 x 2	1920	2 x 2
1280	2 x 4	1920	2 x 4	2560	2 x 4	3840	2 x 4
2560	4 x 4	3840	4 x 4	5120	4 x 4	7680	4 x 4
3840	4 x 6	5760	4 x 6	7680	4 x 6	11520	4 x 6
5760	6 x 6	8640	6 x 6	11520	6 x 6	17280	6 x 6
7680	6 x 8	11520	6 x 8	15360	6 x 8	23040	6 x 8
10240	8 x 8	15360	8 x 8	20480	8 x 8	30720	8 x 8
12800	8 x 10	19200	8 x 10	25600	8 x 10	38400	8 x 10
16000	10 x 10	24000	10 x 10	32000	10 x 10	48000	10 x 10
19200	10 x 12	28800	10 x 12	38400	10 x 12	57600	10 x 12
23040	12 x 12	34560	12 x 12	46080	12 x 12	69120	12 x 12



CALIFORNIA DYNAMICS CORPORATION  
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032  
PH 323-223-3882 FAX 323-223-7941

email: caldyn@earthlink.net  
"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

TAG: \_\_\_\_\_

Dwg. No. <b>F481</b>	Date <b>01/30/14</b>
PREP By:	Date
CHKD By:	Date

TYPE

**ECP**

EASILY CUT PAD

DO NOT SCALE DRAWING