

**RP - PAD**

Is useful under equipment of all speeds.  
To minimize transmission of disturbances  
from entering floor.

**HIGH SPEED 1500 CPM AND UP**

RP- PAD eliminates noise and reduces  
vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

**MEDIUM SPEED 250 CPM TO 1500 CPM**

RP- PAD simplifies mounting and limits noise  
transmitted from:

- COMPRESSOR (TANK MOUNTED)
- AIR CONDITIONERS
- FANS

**LOW SPEED 0 TO 250 CPM**

RP - PAD limits impact shock and noise  
transmission from:

- PUNCH PRESSES
- SHEARS
- BUSINESS MACHINES
- HAMMERS AND PRESSES


**RP - PAD**

Is useful under equipment to minimize  
transmission of disturbances from the floor.


**LOW SPEED AND HIGH SPEED  
0 TO 250 CPM & 1500 CPM & UP**

KP -PAD protects these sensitive  
instruments, machine and devises  
from low frequency shocks and high  
frequency vibrations present in the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

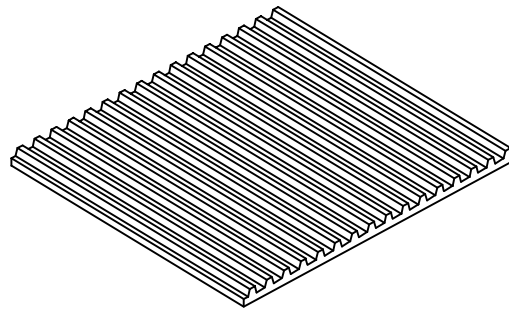

1/4" Thick

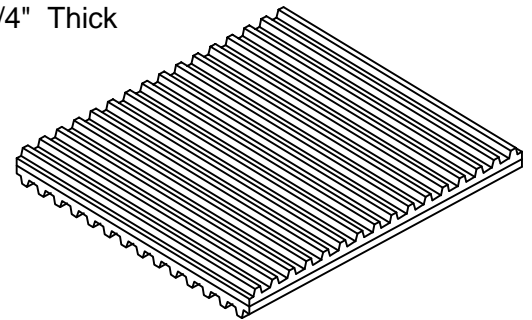

1/2" Thick

**LOAD CAPACITY**

Load Capacity to 60 lbs./Sq. inch

**THICKNESS**

Available in two thickness:

- 1/4" Ribbed on one side
- 1/2" Ribbed two sides

**NON - SKID**

Thread Surfaces Resist "Walking"

**DURABLE**

Material is oil & ozone resistant Neoprene

\* RP only 1/2"

**MAXIMUM PAD SIZE 12" x 180" FACTORY CUT SIZES LISTED**

SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.
2 x 2	160	2 x 18	1440	3 x 36	4320	2 x 144	11520
2 x 3	240	3 x 12	1440	6 x 18	4320	2 x 180	14400
2 x 4	320	4 x 9	1440	9 x 12	4320	3 x 144	17280
3 x 3	360	6 x 6	1440	2 x 72	5760	12 x 36	17280
2 x 6	480	4 x 12	1920	4 x 36	5760	3 x 180	21600
4 x 4	640	3 x 18	2160	12 x 12	5760	24 x 24	23040*
3 x 6	720	2 x 36	2880	9 x 18	6480	24 x 36	35560*
2 x 12	960	4 x 18	2880	3 x 72	8640	36 x 36	51840*
4 x 6	960	6 x 12	2880	6 x 36	8640	12 x 180	86400
3 x 9	1080	9 x 9	3240	12 x 18	8640		



CALIFORNIA DYNAMICS CORPORATION  
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032  
PH 323-223-3882 FAX 323-223-7941

email: caldyn@earthlink.net

"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

TAG: \_\_\_\_\_

Dwg. No. **F266** Date **02/18/14**

PREP By: \_\_\_\_\_ Date \_\_\_\_\_

CHKD By: \_\_\_\_\_ Date \_\_\_\_\_

DO NOT SCALE DRAWING

TYPE  
**RP**  
NEOPRENE  
RIBBED PAD