

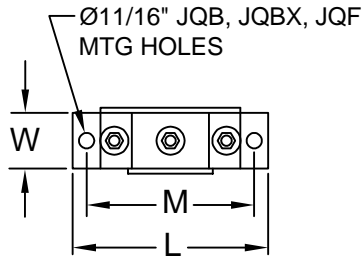



**JQBX Style R**  
shown



Load Transfer adjustment

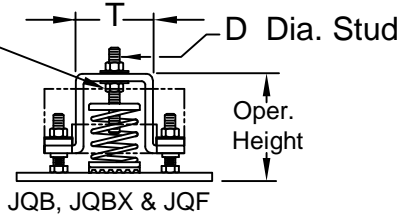

**Style R**  
for attaching to opposite side of equipment.

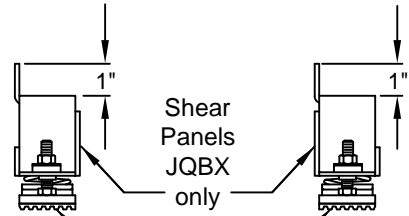

**Style Q**  
for attaching to opposite side of equipment.

Option P  
Neoprene Base Pad Regardless of Style

**Notes:**

Dimensions in Inches. Loads in Pounds.

Neoprene pad 1/4" thick under spring regardless of style.


Adjust Load Transfer while Motion  
Restraint adjustments are loose.

All JQ Isolator/Restraints feature large diameter springs with O.D. not less than 80% of rated deflection height.

**Surface Treatment**


Housings Hot Dip Galvanized (HDG)  
Hardware Zinc Plate.  
Springs Powder Coated or Zinc Plated.

**Isolator Locations**



Isolator Locations	Isolator Selections

**TYPICAL CALLOUT**

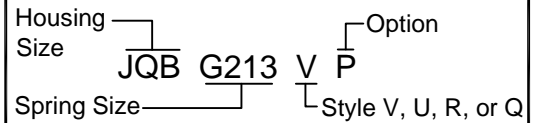

**RATED LOAD**

G Springs 3" Deflection	
JQB/JQBX	JQF
3YW162	G853
G213	3YW1036
G303	G1223
3YW325	
3YW496	

OPA - 0070 PRE-APPROVED MAXIMUM ALLOWABLE LOADS		
SIZE	HORIZ.	VERT.
JQB	1000	1600
JQBX	1500	2000
JQF	2900	4000

Housing Size	L	W	M	T	D	Approx. Oper. HT.
JQB/JQBX	10-1/2	3-1/2	9	4	1/2	5 - 1/2
JQF	14	5	12	6	5/8	8



CALIFORNIA DYNAMICS CORPORATION  
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032  
PH 323-223-3882 FAX 323-223-7941

email: caldyn@earthlink.net  
"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB: \_\_\_\_\_  
CUSTOMER: \_\_\_\_\_  
TAG: \_\_\_\_\_

Dwg. No. **F311** Date **02/11/14**  
PREP By: \_\_\_\_\_ Date \_\_\_\_\_  
CHKD By: \_\_\_\_\_ Date \_\_\_\_\_  
**DO NOT SCALE DRAWING**

TYPE **JQ**  
**ISOLATOR/RESTRAINTS WITH CALIFORNIA PRE-APPROVED SEISMIC PROTECTION OPA - 0070 3" DEFLECTION**