




**LIGHT WEIGHT HANGER**  
CH-E21 - E415

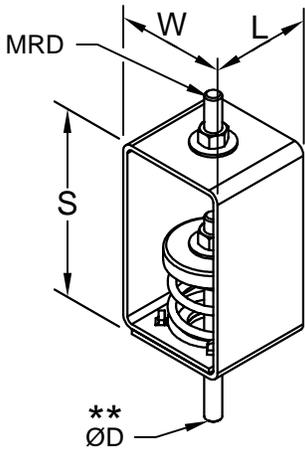

**BASIC HANGER**  
CH-E500-E1060

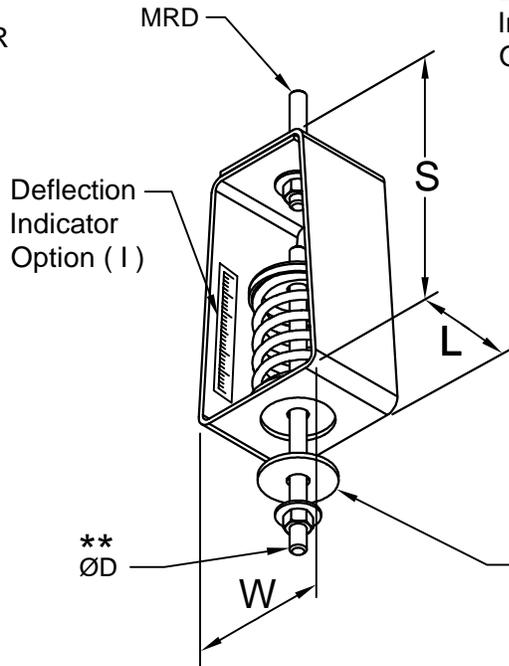

**\* EXTRA STRENGTH HANGER**  
CH-E1580 - E2860

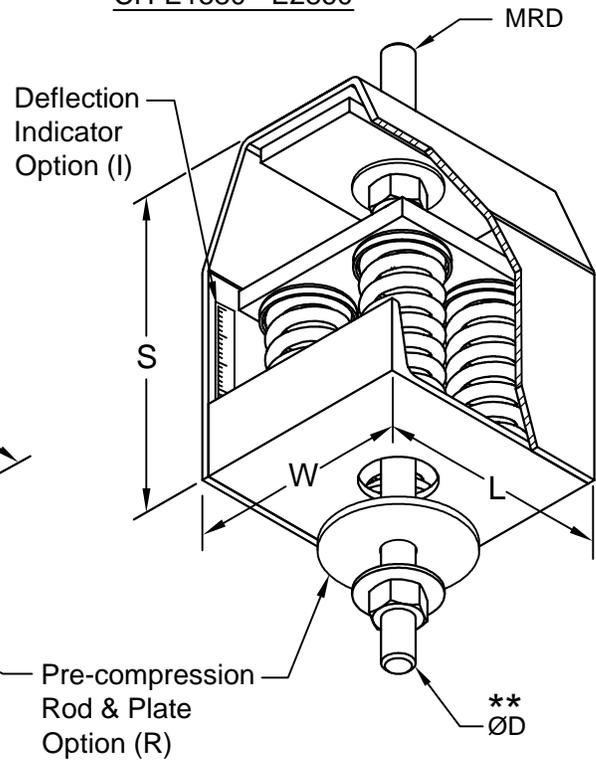

**Notes:**

\* The housings of these units are specially reinforced for extra strength

\*\* The pre-compression rod is furnished with units which have the "R" option (specify Rod Dia) this rod will extend about 3" below the bottom of the hanger housing.

**Maximum Rod Diameter (MRD)**  
Rod, nuts and washers are by others.


**Minimum Additional Travel**  
50% of required deflection at rated load.

**Installation Instructions**  
See file F96

**TYPICAL CALLOUT**

CH - E106 - R I  
(Type) - (Size) - (Options)

**Hanger Location**

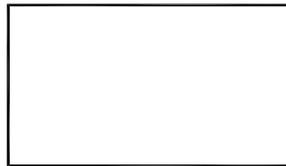

Hanger Selection	Hanger Selection

CH Max. Load (lbs)	DIMENSIONS (Inches)				
	S	W	L	MRD	ØD
E 21 E 55 E 79 E 106	4-3/4	2-3/4	2-1/2	1/2	3/8
E 143 E 187 E 244					1/2
E 318 E 415	6-1/2	3-5/8	2-1/2	3/4	5/8
E 500 715 1060					3/4
1580 * 2044 * 2860 *	8-1/4	6	6	7/8	7/8



CALIFORNIA DYNAMICS CORPORATION  
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032  
PH. 323-223-3882 FAX. 323-223-7941  
email: caldyn@earthlink.net

"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB:

CUSTOMER:

TAG:

Dwg. No.

F361

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

10/12/16

Date

Date

TYPE

**CH**

1" DEFLECTION  
SPRING HANGER