

FP - PAD

Is useful under equipment of all speeds.
To minimize transmission of disturbances
from entering floor.

ALL SPEEDS

Prevents equipments rocking by compensating
for mismatch of 4 rigid support points to typical
wavy floor surface:

- EQUIPMENT w/4 rigid support points.
- COMPRESSOR (TANK MOUNTED)

HIGH SPEED 1500 CPM AND UP

FP- PAD eliminates noise and reduces
vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

LOW SPEED 0 TO 250 CPM

FP - PAD limits impact shock transmission
and simplifies installation of:

- PUNCH PRESSES
- SHEARS
- VACUUM PUMPS
- HAMMERS


FP - PAD

Is useful under equipment to minimize
transmission of disturbances from the floor.

**LOW SPEED AND HIGH SPEED
0 TO 250 CPM & 1500 CPM & UP**

FP -PAD protects these sensitive
instruments, machine and devises
from low frequency shocks and high
frequency vibrations present in
the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

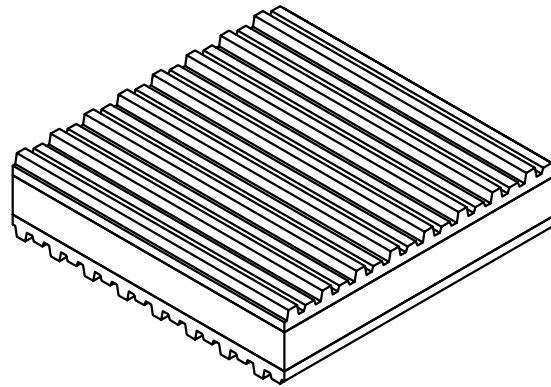

LOAD CAPACITY

Load capacity to 60 lbs/SQ. inch.

THICKNESS

Standard thickness 1" others are available.

NON - SKID

Thread surfaces resist "Walking"

DURABLE

Material is ozone resistant Neoprene Rubber blend
and Cork.

MAXIMUM PAD SIZE 36" x 36" FACTORY CUT SIZES LISTED							
STANDARD CAPACITY							
SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.
2 x 2	160	3 x 3	360	6 x 6	1440	12 x 12	5760
2 x 3	240	3 x 6	720	6 x 9	2160	12 x 18	8640
2 x 4	320	3 x 9	1080	6 x 12	2880	12 x 24	11520
2 x 6	480	3 x 12	1440	6 x 18	4320	12 x 36	17280
2 x 12	960	3 x 18	2160	6 x 36	6480		
2 x 18	1440	3 x 24	2880			18 x 18	12960
2 x 24	1920	3 x 36	4320	9 x 9	2880	18 x 24	17280
2 x 36	2880			9 x 12	4320	18 x 36	25920
		4 x 4	640	9 x 18	6480		
		4 x 6	960			24 x 24	23040
		4 x 9	1440			24 x 36	35560
		4 x 12	1920				
		4 x 18	2880			36 x 36	51840
		4 x 36	5760				



CALIFORNIA DYNAMICS CORPORATION
 5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
 PH. 323-223-3882 FAX. 323-223-7941
 email: caldyn@earthlink.net

"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB:

CUSTOMER:

TAG:

Dwg. No.

F260

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

7/12/16

Date

Date

TYPE

FP

1" RIBBED
SANDWICH PAD

RIBBED NEOPRENE
AND CORK