





Style V

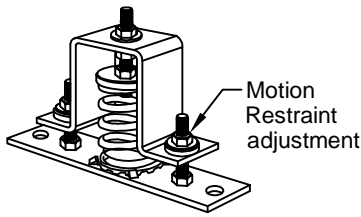


Style R
For attachment to side of equipment.

Option P
Neoprene Pad regardless of Style




OSE 4 Spring
Style V

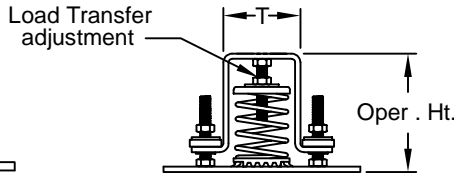


OSA, OSB, OSE & OSF
Style U

Isolator Locations



Isolator Locations	Isolator Selections

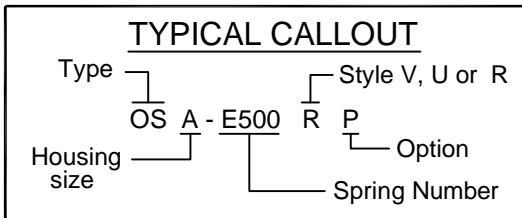

NOTES:

Dimensions in Inches. Loads in pounds.

Neoprene pad 1/4" thick under spring regardless of style.

Adjust Load Transfer while Motion Restraint adjustments are loose.

All Type OS Isolator/Restraints feature large diameter springs with O.D. not less than 80% of rated deflection height.

For compact support of heavy loads, some OS's include inner springs. For low profile support of heavy loads, OSE's have clustered springs.

Installation Instruction

See file F78

Housing Size	L	M	T	W	D	H	Approx. Oper. Ht.
A	7	6	2-3/4	2	3/8	9/16	4 - 1/2
B	10-1/2	9	4	3-1/2	1/2	11/16	5 - 1/2
E	14	12	6	5	5/8	11/16	5
F	14	12	6	5	5/8	11/16	8

RATED LOAD & SPRING NUMBER						
HOUSING SIZE			HOUSING SIZE			
A	B	E	A	B	E	F
E Springs 1" Deflection			F Springs 2" Deflection			
E 21	ET 255	E 976	F 33	FT 121	F 332	F 1159
E 55	ET 347	E 1272	F 43	FT 171	F 480	F 1408
E 79	ET 473	E 1660	F 59	FT 241	F 620	F 1710
E 106	E 630	E 2000	F 83	F 348	F 780	F 2149
E 143	E 806	E 2532	F 120	F 453	F 944	F 2700
E 187	E 1030	E 3204	F 155	F 590	F 1200	
E 244	E 1230	E 4128	F 195	F 676		
E 318	E 1490		F 236	F 787		
E 415	E 1810		F 300	F 918		
E 500	E 2210					
E 633						
E 801						



CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH 323-223-3882 FAX 323-223-7941

email: caldyn@earthlink.net
"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB: _____
CUSTOMER: _____
TAG: _____

Dwg. No. **F486** Date **7/11/16**
PREP By: _____ Date _____
CHKD By: _____ Date _____
DO NOT SCALE DRAWING

TYPE
OS
STEEL SPRING
ISOLATOR/RESTRAINT
1" and 2"
DEFLECTION