

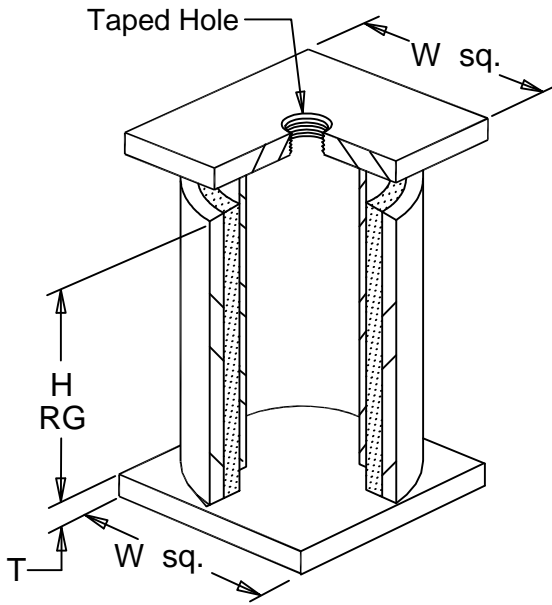


RG

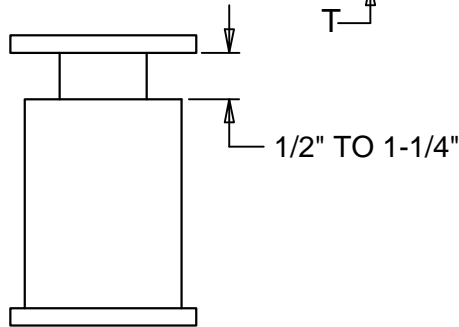


RGB

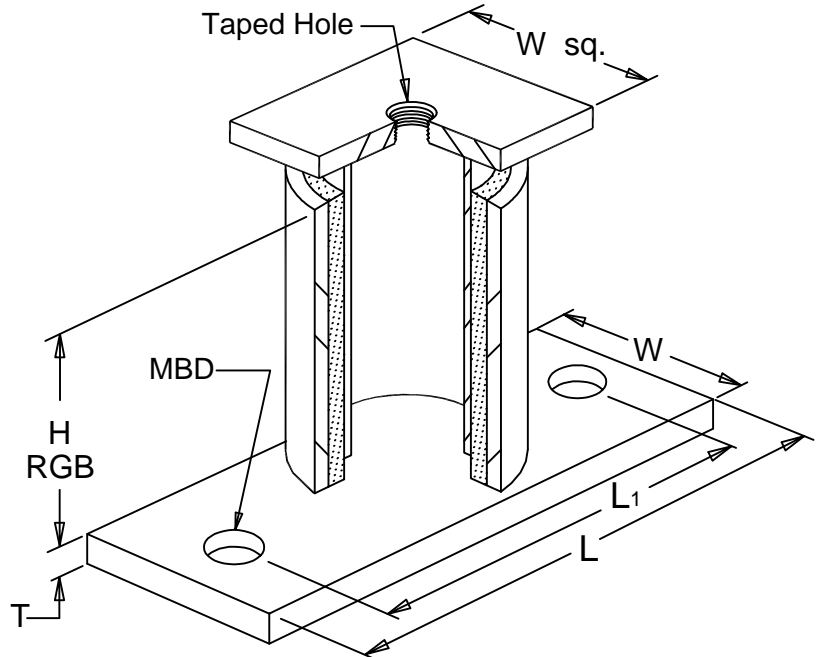

TYPICAL CALLOUT	
Pipe	Size
Guide	RGB - 350

LOAD RATINGS

Size	Horizontal Capacity Per Pair (lbs.)	Rated Defl. (in.)	For use with Pipe size
75	1,000	0.1	5"
200	8,000	0.1	6" thru 12"
350	11,300	0.1	14" thru 24"

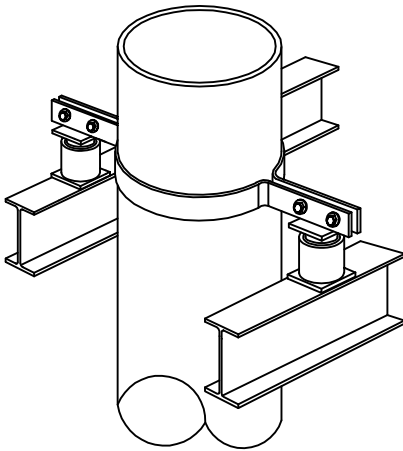

Weld or Bolt pipe clamp or bracket to RG

DIMENSIONS (inches)

Size	W	H RG	H RGB	Tapped Hole	L	L1	T	MBD
75	3	4 1/2	4 1/2	1/2-13 UNC	6	5	1/4	3/8
200	4			7/8-9 UNC	11	8 1/2	3/8	5/8
350	6	5	5	1-1/8-7 UNC	12	9 1/2	1/2	3/4

CALDYN

CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH. 323-223-3882 FAX. 323-223-7941
email: caldyn@earthlink.net

"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB:

CUSTOMER:

TAG:

Dwg. No.

F440

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

12/21/16

Date

Date

TYPE

RG RGB

ALL DIRECTIONAL
PIPE GUIDE