


RP - PAD

Is useful under equipment of all speeds.
To minimize transmission of disturbances from entering floor.


HIGH SPEED 1500 CPM AND UP

RP- PAD eliminates noise and reduces vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

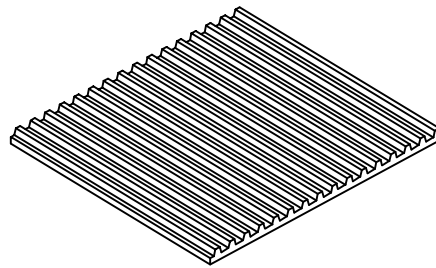

1/4" Thick

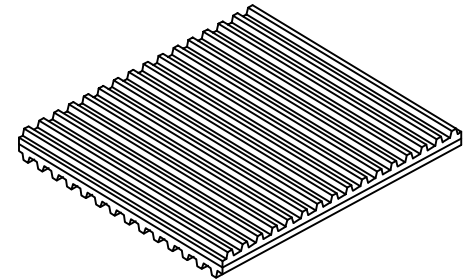

1/2" Thick

MEDIUM SPEED 250 CPM TO 1500 CPM

RP- PAD simplifies mounting and limits noise transmitted from:

- COMPRESSOR (TANK MOUNTED)
- AIR CONDITIONERS
- FANS

LOW SPEED 0 TO 250 CPM

RP - PAD limits impact shock and noise transmission from:

- PUNCH PRESSES
- SHEARS
- BUSINESS MACHINES
- HAMMERS AND PRESSES

LOAD CAPACITY

Load Capacity to 60 lbs./Sq. inch

NON - SKID

Thread Surfaces Resist "Walking"

THICKNESS

Available in two thickness:
1/4" Ribbed on one side
1/2" Ribbed two sides

DURABLE

Material is oil & ozone resistant Neoprene
* RP only 1/2"

RP - PAD

Is useful under equipment to minimize transmission of disturbances from the floor.

**LOW SPEED AND HIGH SPEED
0 TO 250 CPM & 1500 CPM & UP**

KP -PAD protects these sensitive instruments, machine and devises from low frequency shocks and high frequency vibrations present in the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

MAXIMUM PAD SIZE 12" x 180" FACTORY CUT SIZES LISTED

SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.
2 x 2	160	3 x 3	360	4 x 4	360	12 x 12	5760
2 x 3	240	3 x 6	720	4 x 6	720	12 x 18	8640
2 x 4	320	3 x 9	1080	4 x 9	1080	12 x 24	11520
2 x 6	480	3 x 12	1440	4 x 12	1440	12 x 36	17280
2 x 12	960	3 x 18	2160	4 x 18	2160	12 x 180	86400 *
2 x 18	1440	3 x 24	2880	4 x 24	4320	18 x 18	12960
2 x 24	1920	3 x 36	4320	4 x 36	8640		18 x 24
2 x 36	2880	3 x 72	8640	4 x 180	28800 *	24 x 24	23040 *
2 x 72	5760	3 x 144	17280	9 x 9	3240		24 x 36
2 x 144	11520	3 x 180	21600			9 x 12	4320
2 x 180	14400	6 x 6	1440	9 x 18	6480		
		6 x 9	2160				
		6 x 12	2880				
		6 x 18	4320				
		6 x 36	8640				
		6 x 180	43200 *				



CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH. 323-223-3882 FAX. 323-223-7941
email: caldyn@earthlink.net

"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB:

CUSTOMER:

TAG:

Dwg. No.

F266

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

7/26/16

Date

Date

TYPE

RP

**NEOPRENE
RIBBED PAD**