
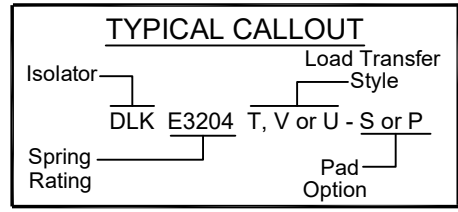


LOAD TRANSFER STYLES

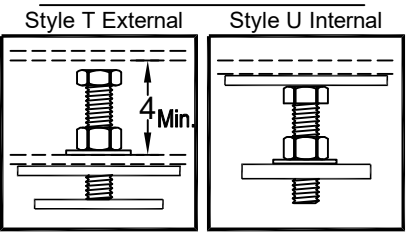

1 Inch Nominal Spring Deflection									
Standard Dimensions***									
DLK Product Ratings	SIZE	FIG. 1	L x W	Stand. Height	Min. Height	FIG. 2	L x W	Stand. Height	Min. Height
E244, E318, E415, E500, E633, E690, E801, E1032	A	2 Hole	8 x 5	6 ³ / ₄	6 ³ / ₄ (MIN.)	4 Hole	12 x 12	6 ³ / ₄	6 ³ / ₄ (MIN.)
E488, E636, E830, E1000, E1266, E1602, E2064									
E2000, E2532, E3204, E4128	B	2 Hole	10 x 10 OR 14 x 6	9 ¹ / ₂	7 ¹ / ₂ (MIN.)	4 Hole	12 x 12 OR 14 x 12	9 ¹ / ₂	6 ¹ / ₂ MIN.
E1490, E1810, E2205, E2525, E2870									7 ¹ / ₂ (MIN.)
E2980, E3620, E4410, E5050, E5740	C	2 Hole	15 x 8	10	7 (MIN.) 8 (MIN.)	4 Hole	16 x 14	10	7 (MIN.)
E4500, E5697, E6210, E7209, E9288									8 (MIN.)
E5960, E7240, E8840, E10100, E11480									8 (MIN.)

***CUSTOMIZABLE PARTS (CONTACT FACTORY OR YOUR LOCAL DISTRIBUTOR FOR MORE DETAILS)
NOTE1: SEISMIC / WIND RATINGS AVAILABLE

CALDYNN
CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH 323-223-3882 FAX 323-223-7941
email: caldyn@earthlink.net
"CALL US - TO SET THINGS RIGHT"
Assoc. Member

JOB: _____
CUSTOMER: _____
TAG: _____

Dwg. No. **F529A** Date **03/16/21**
PREP By: _____ Date _____
CHKD By: _____ Date _____
DO NOT SCALE DRAWING

TYPE
DLK
SPRING ISOLATOR
1" NOMINAL DEFLECTION