

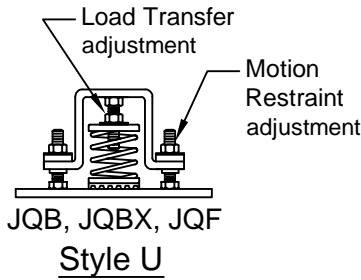
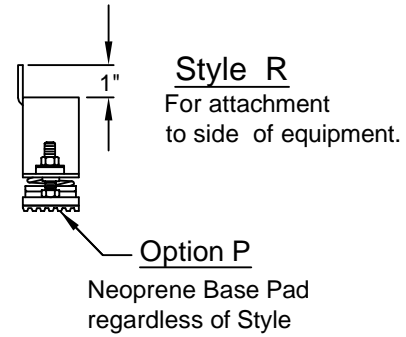
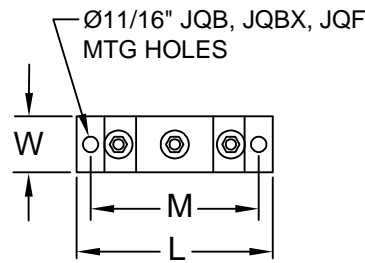


JQBX Style R

shown



Notes:

Dimensions in Inches. Loads in Pounds.

Neoprene pad 1/4" thick under spring regardless of style.

Adjust Load Transfer while Motion Restraint adjustments are loose.

All JQ Isolator/Restraints feature large diameter springs with O.D. not less than 80% of rated deflection height.


Surface Treatment

Housings Hot Dip Galvanized (HDG)
Hardware Zinc Plate.
Springs Powder Coated Plated.

Installation Instruction


See file F78

Isolator Locations



Isolator Locations	Isolator Selections

TYPICAL CALLOUT

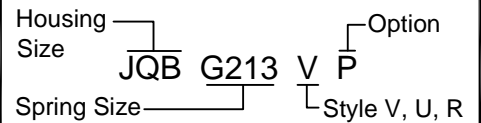

RATED LOAD

G Springs 3" Deflection	
JQB/JQBX	JQF
3YW162	G853
G213	3YW1036
G303	G1223
3YW325	
3YW496	

OPA - 0070
PRE-APPROVED MAXIMUM ALLOWABLE LOADS

SIZE	HORIZ.	VERT.
JQB	1000	1600
JQBX	1500	2000
JQF	2900	4000

Housing Size	L	W	M	T	D	Approx. Oper. HT.
JQB/JQBX	11	3-1/2	9	4	1/2	5 - 1/2
JQF	14	5	12	6	5/8	8



CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH. 323-223-3882 --- FAX. 323-223-7941

Email: caldyn.com

"CALL US - TO SET THINGS RIGHT"



JOB: _____

CUSTOMER: _____

TAG: _____

Dwg. No. F311	Date 3/9/21
PREP By:	Date
CHKD By:	Date
DO NOT SCALE DRAWING	

TYPE **JQ**

ISOLATOR/RESTRAINTS WITH CALIFORNIA PRE-APPROVED SEISMIC PROTECTION OPA - 0070 3" DEFLECTION