
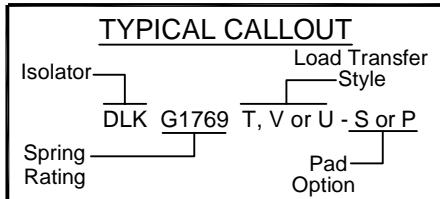


**LOAD TRANSFER STYLES**

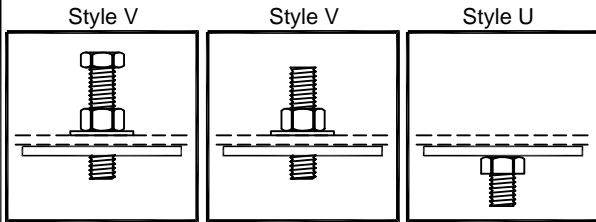

HOUSING & SPRING FINISH	
HOUSING FINISH	SPRING FINISH
PRIMED BLACK (FACTORY FINISH)	POWDER COATED (FACTORY FINISH)
ELECTRO-GALV. (AVAILABLE UPGRADE)	POWDER COATED (FACTORY FINISH)
HOT-DIP GALV. (AVAILABLE UPGRADE)	HYPALON COATED (AVAILABLE UPGRADE)

SEISMIC / WIND CAPACITIES		
SIZE	VERTICAL (LBS., LRFD)	HORIZONTAL (LBS., LRFD)
A	9,000	4,800
B	12,000	6,000

3 & 4 Inch Nominal Spring Deflection										
Standard Dimensions***										
DLK Product Ratings	DEFLECTION	SIZE	FIG. 1	L x W	Stand. Height	Min. Height	FIG. 2	L x W	Stand. Height	Min. Height
G213, G303, G426, G606, G853, G1223, G1399, G1706, G1769, G2446, G2798, 3YW496, 3YW1036, G2072	3	A	2 Hole	12 x 8	13	11 (MIN.)	4 Hole	12 x 12	13	11 (MIN.)
H154, H221, H308, H442, H624, H883, H1294, H1553, H1248, H1766, H2588, H3106	4									13 (MIN.)
G3412, G4144, G4892, G5596, G7076	3	B	2 Hole	16 x 10	13½	11½ (MIN.)	4 Hole	16 x 14	13½	11½ (MIN.)
H2496, H3014, H3532, H4872, H5176, H6212	4									13½ (MIN.)

\*\*\*CUSTOMIZABLE PARTS (CONTACT FACTORY OR YOUR LOCAL DISTRIBUTOR FOR MORE DETAILS)



CALIFORNIA DYNAMICS CORPORATION  
 5572 ALHAMBRA AVE. LOS ANGELES CA, 90032  
 PH 323-223-3882 FAX 323-223-7941  
 email: caldyn@earthlink.net  
 "CALL US - TO SET THINGS RIGHT"  
 Assoc. Member **VISCMA**

JOB: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 TAG: \_\_\_\_\_

Dwg. No. **F530** Date **03/16/21**  
 PREP By: \_\_\_\_\_ Date \_\_\_\_\_  
 CHKD By: \_\_\_\_\_ Date \_\_\_\_\_

TYPE  
**DLK**  
 SPRING ISOLATOR  
 3" & 4" NOMINAL  
 DEFLECTION

DO NOT SCALE DRAWING