


ISOMETRIC VIEW

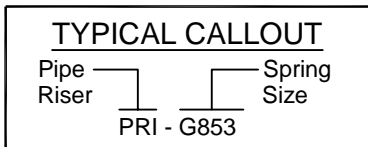

Notes:

Dimensions in inches
Loads in pounds.

Surface Treatments

Hardware Zinc Plated.
Hat and pressure plate Black Primer.
Springs Powder coated.

Hat dimensions are dependant on spring selection. Check with Caldyn.

SPRING ID	RATED CAPACITY (lbs)	SPRING RATE (lbs / in.)
G213, G303, G853, G1223, G1769	213, 303, 853, 1223, 1769	72, 102, 251, 408, 590

3" Deflection Rated Load (lbs)	Threaded Rod		BASE DIMENSIONS	
	DIA.	LENGTH	WIDTH	LENGTH
G213, G303	$\varnothing\frac{5}{8}$ "	20" **	3 $\frac{1}{2}$ "	7 $\frac{3}{4}$ "
G853, G1223, G1769	$\varnothing\frac{3}{4}$ "	20" **	5"	10"

** VERIFY RISER CLAMP SIZE & ROD LENGTH

CALDYN
CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH. 323-223-3882 FAX. 323-223-7941
email: caldyn@earthlink.net
"CALL US - TO SET THINGS RIGHT"
Assoc. Member

JOB: _____
CUSTOMER: _____
TAG: _____

Dwg. No. F345	Date 12/21/16
PREP By: ee	Date 6-29-2021
CHKD By:	Date
DO NOT SCALE DRAWING	

TYPE
PRI
PIPE RISER
PRE-LOADED
3" DEFLECTION