

**RP - PAD**

Is useful under equipment of all speeds.  
To minimize transmission of disturbances from entering floor.

**HIGH SPEED 1500 CPM AND UP**

RP- PAD eliminates noise and reduces vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

**MEDIUM SPEED 250 CPM TO 1500 CPM**

RP- PAD simplifies mounting and limits noise transmitted from:

- COMPRESSOR (TANK MOUNTED)
- AIR CONDITIONERS
- FANS

**LOW SPEED 0 TO 250 CPM**

RP - PAD limits impact shock and noise transmission from:

- PUNCH PRESSES
- SHEARS
- BUSINESS MACHINES
- HAMMERS AND PRESSES

**RP - PAD**


Is useful under equipment to minimize transmission of disturbances from the floor.

**LOW SPEED AND HIGH SPEED  
0 TO 250 CPM & 1500 CPM & UP**

RP -PAD protects these sensitive instruments, machine and devises from low frequency shocks and high frequency vibrations present in the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

**1/2" RP PAD WITH  
1/4" BONDED STEEL PLATE WITH  
11/16" Ø THRU HOLE AND  
KT382A NEOPRENE GROMMET**

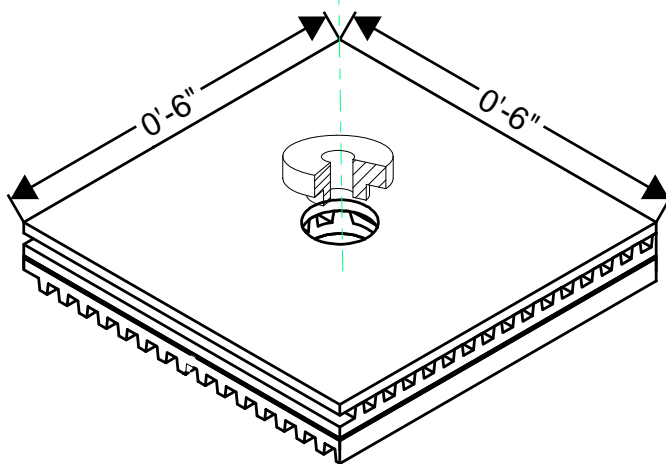

**LOAD CAPACITY**  
Load Capacity to 60 lbs./Sq. inch

**NON - SKID**  
Thread Surfaces Resist "Walking"

**THICKNESS**  
Available in two thickness:  
1/4" Ribbed on one side  
1/2" Ribbed two sides

**DURABLE**  
Material is oil & ozone resistant Neoprene  
\* RP only 1/2"

MAXIMUM PAD SIZE 12" x 180" FACTORY CUT SIZES LISTED									
SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.		
2 x 2	160	3 x 3	360	4 x 4	360	12 x 12	5760		
2 x 3	240	3 x 6	720	4 x 6	720	12 x 18	8640		
2 x 4	320	3 x 9	1080	4 x 9	1080	12 x 24	11520		
2 x 6	480	3 x 12	1440	4 x 12	1440	12 x 36	17280		
2 x 12	960	3 x 18	2160	4 x 18	2160	12 x 180	86400 *		
2 x 18	1440	3 x 24	2880	4 x 24	4320	18 x 18	12960		
2 x 24	1920	3 x 36	4320	4 x 36	8640				
2 x 36	2880	3 x 72	8640	4 x 180	28800 *	18 x 24	19440		
2 x 72	5760	3 x 144	17280	9 x 9	3240	24 x 24	23040 *		
2 x 144	11520	3 x 180	21600			9 x 12	4320	24 x 36	35560 *
2 x 180	14400	6 x 6	1440			9 x 18	6480	36 x 36	51840 *
				6 x 9	2160				
				6 x 12	2880				
				6 x 18	4320				
				6 x 36	8640				
		6 x 180	43200 *						

**CALDYN**

CALIFORNIA DYNAMICS CORPORATION  
20500 PRAIRIE ST. CHATSWORTH CA, 91311  
Phone 323-223-3882  
Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB: \_\_\_\_\_

CUSTOMER: \_\_\_\_\_

TAG: \_\_\_\_\_

Dwg. No. <b>F266</b>	Date
PREP By:	Date
CHKD By:	Date
DO NOT SCALE DRAWING	

TYPE  
**RP/SP/H/KT382A**

1/2" RP RIBBED NEOPRENE PAD W/  
1/4" BONDED STEEL PLATE W/  
11/16" THRU HOLE AND  
KT382A NEOPRENE GROMMET