

RP - PAD

Is useful under equipment of all speeds.
To minimize transmission of disturbances
from entering floor.

HIGH SPEED 1500 CPM AND UP

RP- PAD eliminates noise and reduces
vibration transmitted from:

ENGINES
TRANSFORMERS
PUMPS and PIPING
STEAM GENERATORS
CRUSHERS

MEDIUM SPEED 250 CPM TO 1500 CPM



RP- PAD simplifies mounting and limits noise
transmitted from:

COMPRESSOR (TANK MOUNTED)
AIR CONDITIONERS
FANS

LOW SPEED 0 TO 250 CPM

RP - PAD limits impact shock and noise
transmission from:

PUNCH PRESSES
SHEARS
BUSINESS MACHINES
HAMMERS AND PRESSES

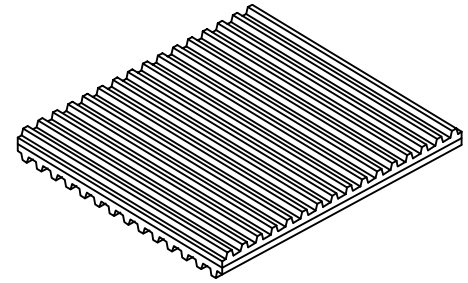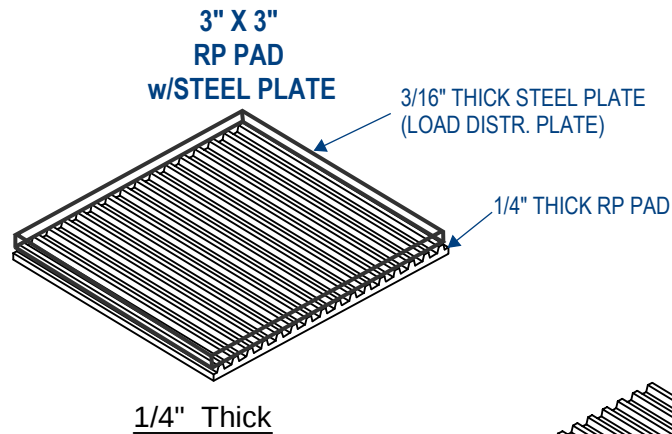

LOAD CAPACITY

Load Capacity to 60 lbs./Sq. inch

THICKNESS

Available in two thickness:
1/4" Ribbed on one side
1/2" Ribbed two sides

NON - SKID

Thread Surfaces Resist "Walking"

DURABLE

Material is oil & ozone resistant Neoprene
* RP only 1/2"

RP - PAD

Is useful under equipment to minimize
transmission of disturbances from the floor.

LOW SPEED AND HIGH SPEED

0 TO 250 CPM & 1500 CPM & UP

RP -PAD protects these sensitive
instruments, machine and devises
from low frequency shocks and high
frequency vibrations present in the floor:

GRINDERS
SURFACE PLATES
MACHINE TOOLS
INSTRUMENTS

MAXIMUM PAD SIZE 12" x 180" FACTORY CUT SIZES LISTED							
SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.
2 x 2	160	3 x 3	360	4 x 4	360	12 x 12	5760
2 x 3	240	3 x 6	720	4 x 6	720	12 x 18	8640
2 x 4	320	3 x 9	1080	4 x 9	1080	12 x 24	11520
2 x 6	480	3 x 12	1440	4 x 12	1440	12 x 36	17280
2 x 12	960	3 x 18	2160	4 x 18	2160	12 x 180	86400 *
2 x 18	1440	3 x 24	2880	4 x 24	4320	18 x 18	12960
2 x 24	1920	3 x 36	4320	4 x 36	8640		
2 x 36	2880	3 x 72	8640	4 x 180	28800 *	18 x 24	19440
2 x 72	5760	3 x 144	17280	9 x 9 9 x 12 9 x 18	3240 4320 6480	24 x 24	23040 *
2 x 144	11520	3 x 180	21600			24 x 36	35560 *
2 x 180	14400	6 x 6 6 x 9 6 x 12 6 x 18 6 x 36 6 x 180	1440 2160 2880 4320 8640 43200 *				

CALDYN

CALIFORNIA DYNAMICS CORPORATION

20500 PRAIRIE ST. CHATSWORTH CA, 91311

Phone 323-223-3882

Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB:

CUSTOMER:

TAG:

Dwg. No.

F266

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

Date

Date

TYPE

RP

**NEOPRENE
RIBBED PAD**