


### RP - PAD

Is useful under equipment of all speeds.  
To minimize transmission of disturbances  
from entering floor.

### HIGH SPEED 1500 CPM AND UP

RP- PAD eliminates noise and reduces  
vibration transmitted from:

ENGINES  
TRANSFORMERS  
PUMPS and PIPING  
STEAM GENERATORS  
CRUSHERS

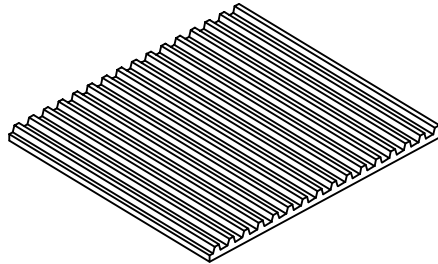


1/4" Thick

### MEDIUM SPEED 250 CPM TO 1500 CPM

RP- PAD simplifies mounting and limits noise  
transmitted from:

COMPRESSOR (TANK MOUNTED)  
AIR CONDITIONERS  
FANS

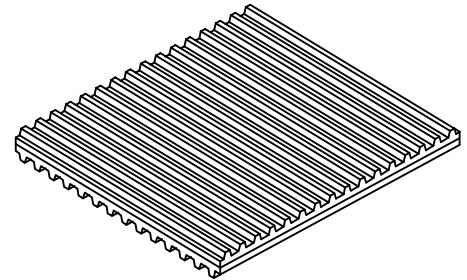

1/2" Thick

### LOW SPEED 0 TO 250 CPM

RP - PAD limits impact shock and noise  
transmission from:

PUNCH PRESSES  
SHEARS  
BUSINESS MACHINES  
HAMMERS AND PRESSES

### LOAD CAPACITY

Load Capacity to 60 lbs./Sq. inch

### THICKNESS

Available in two thickness:  
1/4" Ribbed on one side  
1/2" Ribbed two sides

### NON - SKID

Thread Surfaces Resist "Walking"

### DURABLE

Material is oil & ozone resistant Neoprene  
\* RP only 1/2"

### RP - PAD

Is useful under equipment to minimize  
transmission of disturbances from the floor.

### LOW SPEED AND HIGH SPEED

### 0 TO 250 CPM & 1500 CPM & UP

RP -PAD protects these sensitive  
instruments, machine and devises  
from low frequency shocks and high  
frequency vibrations present in the floor:

GRINDERS  
SURFACE PLATES  
MACHINE TOOLS  
INSTRUMENTS

### MAXIMUM PAD SIZE 12" x 180" FACTORY CUT SIZES LISTED

SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.	SIZE (Inches)	Max. Load Selection at 40 P.S.I.
2 x 2	160	3 x 3	360	4 x 4	360	12 x 12	5760
2 x 3	240	3 x 6	720	4 x 6	720	12 x 18	8640
2 x 4	320	3 x 9	1080	4 x 9	1080	12 x 24	11520
2 x 6	480	3 x 12	1440	4 x 12	1440	12 x 36	17280
2 x 12	960	3 x 18	2160	4 x 18	2160	12 x 180	86400 *
2 x 18	1440	3 x 24	2880	4 x 24	4320	18 x 18	12960
2 x 24	1920	3 x 36	4320	4 x 36	8640		
2 x 36	2880	3 x 72	8640	4 x 180	28800 *		
2 x 72	5760	3 x 144	17280	9 x 9 9 x 12 9 x 18	3240 4320 6480	18 x 24	19440
2 x 144	11520	3 x 180	21600			24 x 24	23040 *
2 x 180	14400	6 x 6 6 x 9 6 x 12 6 x 18 6 x 36 6 x 180	1440 2160 2880 4320 8640 43200 *			24 x 36	35560 *
						36 x 36	51840 *

**CALDYN**

CALIFORNIA DYNAMICS CORPORATION

20500 PRAIRIE ST. CHATSWORTH CA, 91311

Phone 323-223-3882

Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB:

CUSTOMER:

TAG:

Dwg. No.

**F266**

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

Date

Date

TYPE

**RP**

**NEOPRENE  
RIBBED PAD**