

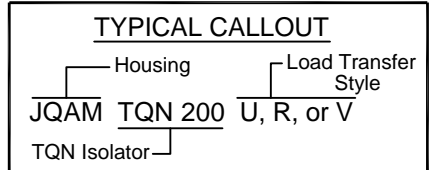


PANELS	
JQB	No
JQBX	Yes



Load Transfer Styles

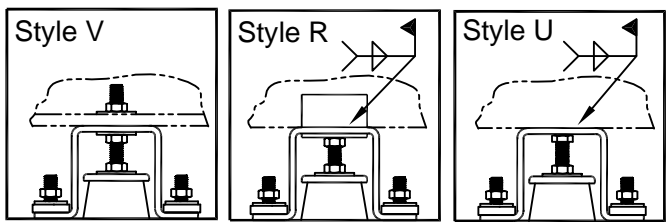

Isolator Locations	Isolator Selections

Housing Size	L	W	M	F	D	Approximate Oper. Height
AM	7	2	6	2 3/4	3/8	2 3/4
B & BX	11	3 1/2	9	4	1/2	5 1/2
E	14	5	12	6	5/8	5 1/2

Notes:
 Dimensions are in inches.
 Loads in pounds.

Adjust Load Transfer Nut for proper operation.

Surface Treatments
 Housing: Hot Dip Galvanized (HDG)
 Hardware: Zinc Plated.

Installation Instructions
 See file F75.

OPA - 0070 PRE-APPROVED HOUSING ALLOWABLE LOADS		
SIZE	HORIZ.	VERT.
AM	600	900
B	1000	1600
BX	1500	2000
E	3200	4300

RATED STATIC DEFLECTION 1/2"					
JQAM Size		JQB & BX Size		JQE Size	
Isolator Rating lbs.	Color Code	Isolator Rating lbs.	Color Code	Isolator Rating lbs.	Color Code
40	ORANGE	300	YELLOW	1800	GREEN
55	YELLOW	520	GREEN	3000	BLUE
80	GREEN	750	BLUE	5000	WHITE
120	ORANGE	1100	WHITE		
200	YELLOW				
280	GREEN				
400	BLUE				

CALDYN
 CALIFORNIA DYNAMICS CORPORATION
 20500 PRAIRIE ST. CHATSWORTH CA, 91311
 Phone 323-223-3882
 Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB: _____
 CUSTOMER: _____
 TAG: _____

Dwg. No. **F310** Date _____
 PREP By: _____ Date _____
 CHKD By: _____ Date _____

DO NOT SCALE DRAWING

TYPE
JQ-TQN
 TOP QUALITY NEOPRENE
 ISOLATOR/RESTRAINTS
 WITH CALIFORNIA
 PRE-APPROVED
OPA - 0070
 1/2" DEFLECTION