


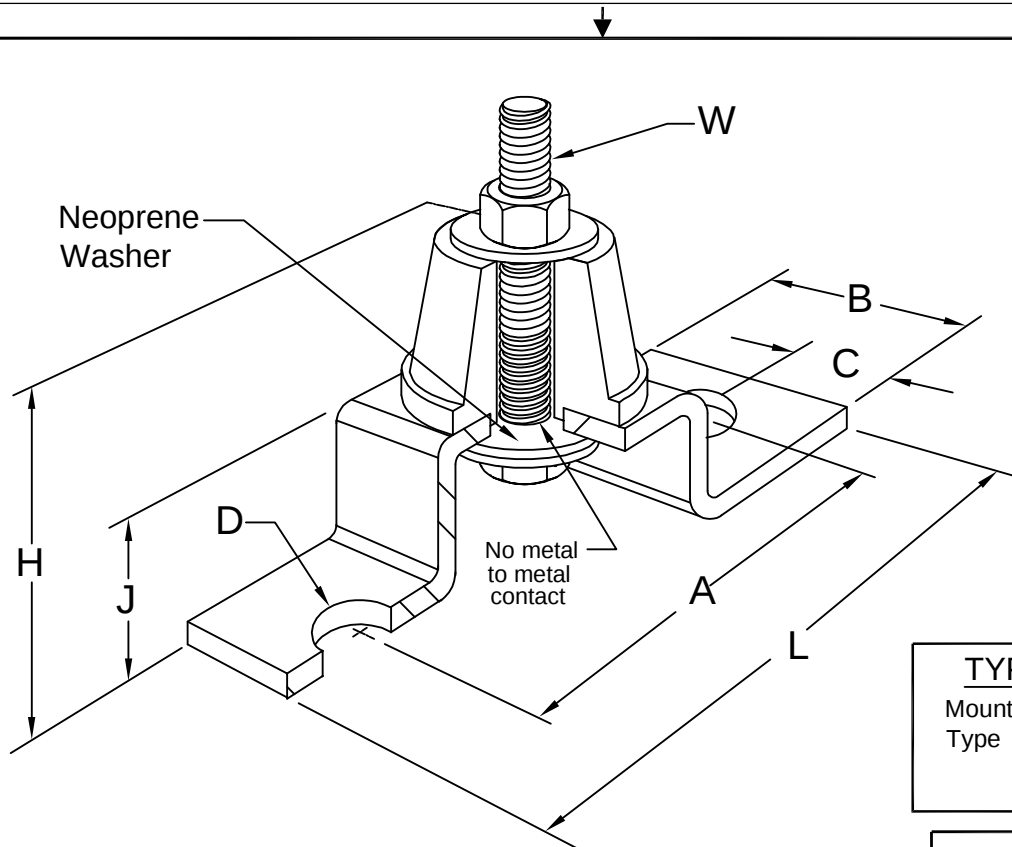

TYPICAL CALLOUT

Mount Type RQD B 200

Size 200 Color 200

MAXIMUM LOAD RATINGS (lbs)			
COLOR CODE	SIZE		
	A	B	C
ORANGE	40	120	—
YELLOW	55	200	300
GREEN	80	280	520
BLUE	130	400	750
WHITE	—	—	1100

Mount Locations

Mount Locations	Mount Selections

Notes:

Dimensions are in inches.

Type RQ: Single Deflection ($\frac{1}{4}$ " Max.)

Type RQD: Double Deflection ($\frac{1}{2}$ " Max.)

Neoprene Type	DIMENSION (Inches)							
	A	B	C	D	L	J	W	H
RQ - A	3 . 50	2 . 00	1.00	. 44	4 . 50	1 . 00	3/8	2 . 50
RQ - B	4 . 31	2 . 50	1.25	. 56	5 . 38	1 . 50	5/8	2 . 75
RQ - C	5 . 00	3 . 25	1.625	. 69	6 . 19	1 . 88	3/4	3 . 38
RQD - A	3 . 50	2 . 00	1.00	. 44	4 . 50	1 . 00	3/8	2 . 50
RQD - B	4 . 31	2 . 50	1.05	. 56	5 . 38	1 . 50	5/8	3 . 38
RQD - C	5 . 00	3 . 25	1.625	. 69	6 . 19	1 . 88	3/4	4 . 48

CALDYN

CALIFORNIA DYNAMICS CORPORATION
20500 PRAIRIE ST. CHATSWORTH CA, 91311
Phone 323-223-3882
Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB:

CUSTOMER:

TAG:

Dwg. No.
F457

PREP By:

CHKD By:

DO NOT SCALE DRAWING

Date

Date

Date

TYPE

RQ & RQD

NEOPRENE MOUNT
WITH INTEGRAL
SEISMIC RESTRAINTS