ECP - PAD

Is useful under equipment of all speeds. To minimize transmission of disturbances to the floor and disturbances from the floor.

HIGH SPEED 1500 CPM AND UP

ECP - Pad eliminates noise and reduces vibrations transmitted from:

AIR CONDITIONING EQUIPMENT TRANSFORMERS ENGINES PUMPS AND PIPING STEAM GENERATORS

MEDIUM SPEED 250 to 1500 CPM

ECP - Pad simplifies mounting and limits noise transmission from:

COMPRESSORS (TANK MOUNTED) AIR CONDITIONERS FANS

LOW SPEED 0 to 250 CPM


ECP - Pad limits impact shock and noise from: PUNCH PRESSES SHEARS

LOW & HIGH SPEED 0 to 250 CPM

AND 1500 CPM AND UP

ECP - Pad protects these sensitive instruments, machines and devises from low frequency shocks and high frequency vibrations present in the floor from:

GRINDERS SURFACE PLATES MACHINE TOOLS INSTRUMENTS

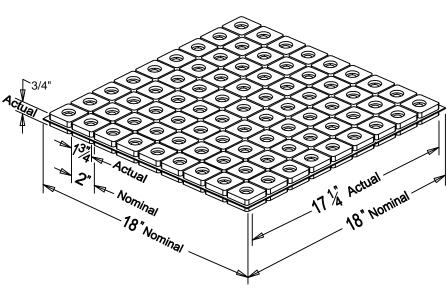

MATERIAL

18" x 18" x 3/4" Thick Rubber. Easily knife cut on site.

LOAD CAPACITY

Load capacity to 60 Pounds/Square Inch = 60 PSI

NON - SKID

Tread surfaces resist "Walking"

Conservative 40 P.S.I or less Selection Guides assume equal weight distribution of 4 points or 6 points, or 8 points or 12 points of support.

EXAMPLE

5000 pound weight centered equipment can be supported at 4 corners by 6x6 or 6 points by 4x6 or 8 points by 4x4 or 12 points by 4x4.

4 Point Selection Guide	
Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)
640	2 x 2
1280	2 x 4
2560	4 x 4
3840	4 x 6
5760	6 x 6
7680	6 x 8
10240	8 x 8
12800	8 x 10
16000	10 x 10
19200	10 x 12
23040	12 x 12

JOB:

TAG:

Pounds Supported At 40 P.S.I. (Inches) 960 2 x 2 1920 2 x 4 3840 4 x 4 5760 4 x 6 8640 6 x 6	9
At 40 P.S.I. (Inches) 960 2 x 2 1920 2 x 4 3840 4 x 4 5760 4 x 6	
1920 2 x 4 3840 4 x 4 5760 4 x 6	
3840 4 x 4 5760 4 x 6	
5760 4 x 6	
1 0.00	
8640 6 x 6	
00.0	
11520 6 x 8	
15360 8 x 8	
19200 8 x 10	
24000 10 x 10	
28800 10 x 12	
34560 12 x 12	

8 Point Selection Guide		
Pounds Supported	Nominal SIZE	
At 40 P.S.I.	(Inches)	
1280	2 x 2	
2560	2 x 4	
5120	4 x 4	
7680	4 x 6	
11520	6 x 6	
15360	6 x 8	
20480	8 x 8	
25600	8 x 10	
32000	10 x 10	
38400	10 x 12	
46080	12 x 12	

12 Point Selection Guide	
Pounds	Nominal
Supported	SIZE
At 40 P.S.I.	(Inches)
1920	2 x 2
3840	2 x 4
7680	4 x 4
11520	4 x 6
17280	6 x 6
23040	6 x 8
30720	8 x 8
38400	8 x 10
48000	10 x 10
57600	10 x 12
69120	12 x 12

CALDYN

CALIFORNIA DYNAMICS CORPORATION

20500 PRAIRIE ST. CHATSWORTH CA, 91311 Phone 323-223-3882 Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

CUSTOMER:	

Dwg. No. F481	Date 7/12/16
PREP By:	Date
CHKD By:	Date

DO NOT SCALE DRAWING

ECP

TYPE

EASILY CUT PAD