ECP - PAD IS USEFUL UNDER EQUIPMENT OF ALL SPEEDS

TO MINIMIZE TRANSMISSION OF DISTURBANCES TO THE FLOOR.

HIGH SPEED 1500 CPM AND UP ECP - Pad eliminates noise and reduces vibrations transmitted from:

AIR CONDITIONING EQUIP. TRANSFORMERS

ENGINES PUMPS AND PIPING

STEAM GENERATORS
MEDIUM SPEED ECP - Pad simplifies mounting and

limits noise transmission from:

COMPRESSORS (TANK MOUNTED)

AIR CONDITIONERS

FANS

LOW SPEED 0 TO 250 CPM

250 to 1500 CPM


ECP - Pad limits impact shock and noise transmission from: PUNCH PRESSES


SHEARS

TO MINIMIZE TRANSMISSION OF DISTURBANCES FROM THE FLOOR.

LOW SPEED AND HIGH SPEED 0 TO 250 CPM AND 1500 CPM AND UP ECP - Pad protects these sensitive instruments, machines and devices from low frequency shocks and high frequency vibrations present in the floor.

GRINDERS SURFACE PLATES MACHINE TOOLS INSTRUMENTS

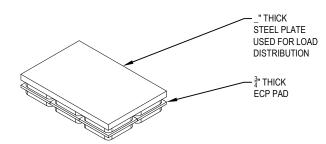

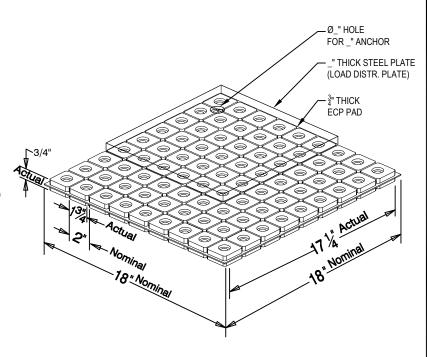

MATERIAL

18"x18"x34" thick Rubber. Easily knife cut on site.

LOAD CAPACITY

Load Capacity to 60 Pounds/Square Inch = 60 P.S.I.

NON - SKID

Tread Surfaces Resist "Walking"

Conservative 40 P.S.I. or less Selection Guides assume equal weight distribution of 4 points of support or 6 points or 8 points or 12 points.

EXAMPLE: 5000 pound weight centered equipment can be supported at 4 corners by 6x6 or 6 points by 4x6 or 8 points by 4x4 or 12 points by 4x4

NEOPRENE PAD:

4 Point Selection Guide		
Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)	
640	2 x 2	
1280	2 x 4	
2560	4 x 4	
3840	4 x 6	
5760	6 x 6	
7680	6 x 8	
10240 8 x 8		
12800	8 x 10	
16000	10 x 10	
19200	10 x 12	
23040	12 x 12	

6 Point Selection Guide		
Pounds	Nominal	
Supported	SIZE	
At 40 P.S.I.	(Inches)	
960	2 x 2	
1920	2 x 4	
3840	4 x 4	
5760	4 x 6	
8640	6 x 6	
11520	6 x 8	
15360	8 x 8	
19200	8 x 10	
24000	10 x 10	
28800	10 x 12	
34560	12 x 12	

_			
е	8 Point Selection Guide		
	Pounds Supported At 40 P.S.I.	Nominal SIZE (Inches)	
	1280	2 x 2	
1	2560	2 x 4	
	5120	4 x 4	
	7680	4 x 6	
	11520	6 x 6	
	15360	6 x 8	
	20480	8 x 8	
1	25600	8 x 10	
1	32000	10 x 10	
	38400	10 x 12	
	46080	12 x 12	

12 Point Selection Guide		
Pounds	Nominal	
Supported	SIZE	
At 40 P.S.I.	(Inches)	
1920	2 x 2	
3840	2 x 4	
7680	4 x 4	
11520	4 x 6	
17280	6 x 6	
23040	6 x 8	
30720	8 x 8	
38400	8 x 10	
48000	10 x 10	
57600	10 x 12	
69120	12 x 12	

¾" THICK

NEOPRENE PADS

w/ LOAD PLATE

GAL	DYN
CALIFORNIA DYNA	MICS CORPORATION

20500 PRAIRIE ST. CHATSWORTH CA, 91311
Phone 323-223-3882
Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB:	PREP By: Date	TYPE
	CHKD By: Date	
TAG:	SCALE: NO	NE NI