


WP - PAD

Prevents equipment rocking by compensating for mismatch of 4 rigid support points to typical wavy floor surface:

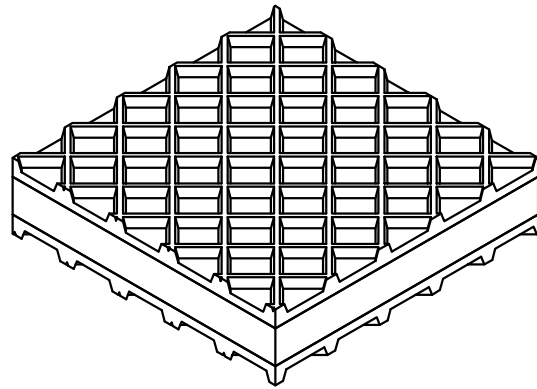

ALL SPEEDS

Prevents equipments rocking by compensating for mismatch of 4 rigid support points to typical wavy floor surface:

- EQUIPMENT w/4 rigid support points.
- COMPRESSOR (TANK MOUNTED)

HIGH SPEED 1500 CPM AND UP

KP- PAD eliminates noise and reduces vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

LOAD CAPACITY

Load capacity to 60 lbs/Sq. inch.

THICKNESS

Standard thickness 1" others are available.

LOW SPEED 0 TO 250 CPM

KP - PAD limits impact shock transmission and simplifies installation of:

- PUNCH PRESSES
- SHEARS
- VACUUM PUMPS
- HAMMERS

NON - SKID

Thread surfaces resist "Walking"

DURABLE

Cork and Neoprene are oil and ozone resistant.

KP - PAD

Is useful under equipment to minimize transmission of disturbances from the floor.

LOW SPEED AND HIGH SPEED 0 TO 250 CPM & 1500 CPM & UP

KP -PAD protects these sensitive instruments, machine and devises from low frequency shocks and high frequency vibrations present in the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

MAXIMUM PAD SIZE 36" x 36" FACTORY CUT SIZES LISTED

STANDARD CAPACITY							
SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.
2 x 2	160	3 x 9	1080	6 x 12	2880	12 x 18	8640
2 x 3	240	2 x 18	1440	9 x 9	3240	18 x 18	12960
2 x 4	320	3 x 12	1440	3 x 36	4320	12 x 36	17280
3 x 3	360	4 x 9	1440	6 x 18	4320	18 x 24	17280
2 x 6	480	6 x 6	1440	9 x 12	4320	24 x 24	23040
4 x 4	640	4 x 12	1920	4 x 36	5760	18 x 36	25920
3 x 6	720	3 x 18	2160	12 x 12	5760	24 x 36	34560
4 x 6	960	2 x 36	2880	9 x 18	6480	36 x 36	51840
2 x 12	960	4 x 18	2880	6 x 36	8640		



CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH 323-223-3882 FAX 323-223-7941

email: caldyn@earthlink.net
"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB: _____

CUSTOMER: _____

TAG: _____

Dwg. No. **F316** Date **02/07/14**

PREP By: _____ Date _____

CHKD By: _____ Date _____

DO NOT SCALE DRAWING

TYPE
WP
1" SANDWICH WAFFLE PAD
NEOPRENE AND CORK