

KP - PAD

Is useful under equipment of all speeds.
To minimize transmission of disturbances
from entering floor.

ALL SPEEDS

Prevents equipments rocking by compensating
for mismatch of 4 rigid support points to typical
wavy floor surface:

- EQUIPMENT w/4 rigid support points.
- COMPRESSOR (TANK MOUNTED)

HIGH SPEED 1500 CPM AND UP

KP- PAD eliminates noise and reduces
vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

LOW SPEED 0 TO 250 CPM

KP - PAD limits impact shock transmission
and simplifies installation of:

- PUNCH PRESSES
- SHEARS
- VACUUM PUMPS
- HAMMERS


KP - PAD

Is useful under equipment to minimize
transmission of disturbances from the floor.

**LOW SPEED AND HIGH SPEED
0 TO 250 CPM & 1500 CPM & UP**

KP -PAD protects these sensitive
instruments, machine and devises
from low frequency shocks and high
frequency vibrations present in
the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

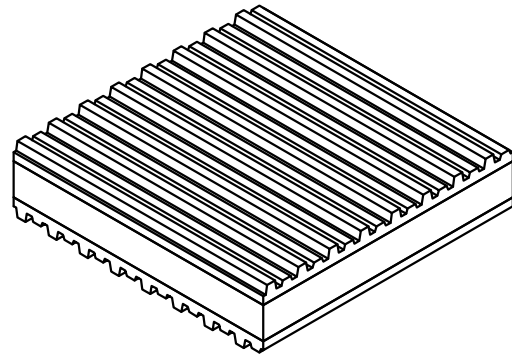

LOAD CAPACITY

Load capacity to 60 lbs/SQ. inch.

THICKNESS

Standard thickness 1" others are available.

NON - SKID

Thread surfaces resist "Walking"

DURABLE

Material is ozone resistant Neoprene Rubber
blend and Cork.

MAXIMUM PAD SIZE 36" x 36" FACTORY CUT SIZES LISTED							
STANDARD CAPACITY							
SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.
2 x 2	160	3 x 9	1080	4 x 18	2880	12 x 18	8640
2 x 3	240	6 x 6	1440	9 x 9	2880	18 x 18	12960
2 x 4	320	4 x 9	1440	9 x 12	4320	12 x 36	17280
3 x 3	360	3 x 12	1440	6 x 18	4320	18 x 24	17280
2 x 6	480	2 x 18	1440	3 x 36	4320	24 x 24	23040
4 x 4	640	4 x 12	1920	12 x 12	5760	18 x 36	25920
3 x 6	720	3 x 18	2160	4 x 36	5760	24 x 36	35560
4 x 6	960	2 x 36	2880	9 x 18	6480	36 x 36	51840
2 x 12	960	6 x 12	2880	6 x 36	6480		



CALIFORNIA DYNAMICS CORPORATION
5572 ALHAMBRA AVE. LOS ANGELES CA, 90032
PH 323-223-3882 FAX 323-223-7941

email: caldyn@earthlink.net

"CALL US - TO SET THINGS RIGHT"

Assoc. Member



JOB: _____

CUSTOMER: _____

TAG: _____

Dwg. No. **F429** Date **01/31/14**

PREP By: _____ Date _____

CHKD By: _____ Date _____

DO NOT SCALE DRAWING

TYPE **KP**

1" RIBBED SANDWICH PAD

NEOPRENE RUBBER BLEND AND CORK