


EP - PAD

Prevents equipment rocking by compensating for mismatch of 4 rigid support points to typical wavy floor surface:

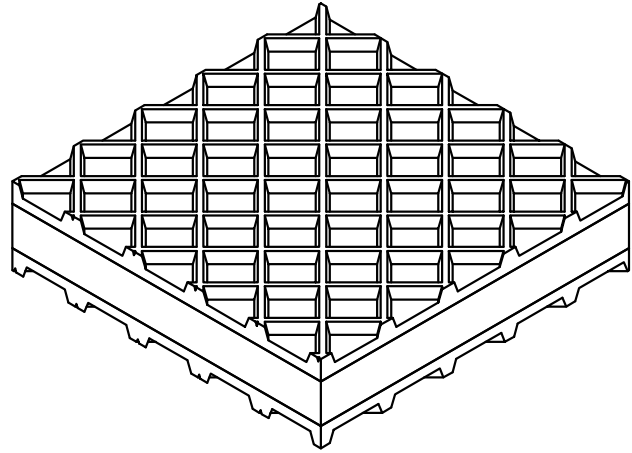

ALL SPEEDS

Prevents equipments rocking by compensating for mismatch of 4 rigid support points to typical wavy floor surface:

- EQUIPMENT w/4 rigid support points.
- COMPRESSOR (TANK MOUNTED)

HIGH SPEED 1500 CPM AND UP

EP- PAD eliminates noise and reduces vibration transmitted from:

- ENGINES
- TRANSFORMERS
- PUMPS and PIPING
- STEAM GENERATORS
- CRUSHERS

LOW SPEED 0 TO 250 CPM

EP - PAD limits impact shock transmission and simplifies installation of:

- PUNCH PRESSES
- SHEARS
- VACUUM PUMPS
- HAMMERS

EP - PAD

Is useful under equipment to minimize transmission of disturbances from the floor.

LOW SPEED AND HIGH SPEED 0 TO 250 CPM & 1500 CPM & UP

EP -PAD protects these sensitive instruments, machine and devises from low frequency shocks and high frequency vibrations present in the floor:

- GRINDERS
- SURFACE PLATES
- MACHINE TOOLS
- INSTRUMENTS

LOAD CAPACITY

Load capacity to 60 lbs/Sq. inch.

THICKNESS

Standard thickness 1" others are available.

NON - SKID

Thread surfaces resist "Walking"

DURABLE

Cork and Neoprene are oil and ozone resistant.

MAXIMUM PAD SIZE 36" x 36" FACTORY CUT SIZES LISTED							
STANDARD CAPACITY							
SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.	SIZE (Inches)	Max. Load Selection At 40 P.S.I.
2 x 2	160	3 x 3	360	6 x 6	1440	18 x 18	12960
2 x 3	240	3 x 6	720	6 x 9	2160	18 x 24	17280
2 x 4	320	3 x 9	1080	6 x 12	2880	18 x 36	25920
2 x 6	480	3 x 12	1440	6 x 18	4320	24 x 24 24 x 36	25920 34560
2 x 12	960	3 x 18	2160	6 x 36	8640		
2 x 18	1440	3 x 24	2880	9 x 9 9 x 12 9 x 18	3240 4320 6480	36 x 36	51840
2 x 24	1920	3 x 36	4320				
2 x 36	2880	4 x 4	640	12 x 12	5760		
		4 x 6	960	12 x 18	8640		
		4 x 9	1440	12 x 24	11520		
		4 x 12	1920	12 x 36	17280		
		4 x 18	2880				
		4 x 36	5760				



CALIFORNIA DYNAMICS CORPORATION
 20500 PRAIRIE ST. CHATSWORTH CA, 91311
 Phone 323-223-3882
 Email: caldyn@caldyn.com

"CALL US - TO SET THINGS RIGHT"

JOB: _____

CUSTOMER: _____

TAG: _____

Dwg. No. F316	Date
PREP By:	Date
CHKD By:	Date
DO NOT SCALE DRAWING	

TYPE

WP

1" SANDWICH WAFFLE PAD
 NEOPRENE AND CORK